


NOT TO SCALE




- 
- SILT FENCE**



-  TEMPORARY SOIL STOCKPILE AREA



NOT TO SCALE



- ## PLAY AREA 2 PLAYGROUND EQUIPMENT

Age group: 6ggs-12ggs / Plastic
Type: Gully-Back, Taper / Plastic
Content Color: Tan
Post Color: Brown
PAV/PAV Thermal Crk-Forest Green
Roll Color: Forest Green
Roll Color: Forest Green
Roll Color: Forest Green
Vinyl Color: Brown
Cnc Roulled Plastic Color: Blue/Tan/White
Section 2 Side A Crk F/Slide B Forest Green
Section 2 Side B Crk F/Slide A Forest Green
Section 1 Side D Crk F/Slide B Straight Slide Forest Green
Section 1 Side C Crk F/Slide B Straight Slide Forest Green
Section 1 Side C Crk F/Slide B Forest Green
Section 1 Side C Crk F/Slide A Forest Green
Section 1 Side C Crk F/Slide Forest Green
Mood Crk (Side A) Forest Green
Exit Side A Crk F/Slide Forest Green
Exit Side B Crk F/Slide A Forest Green
Exit Side B Crk F/Slide B Forest Green
Entry Side A Crk F/Slide A Forest Green
Mouth Option: Burled

Playground Layout Compliance:

- ✓ Final AISC Above Board Regulations
- ✓ CPSC Handbook for Public Safety
- ✓ This play equipment complies with the following performance specifications of ASTM for children 5-12 years old.
- ✓ Not all equipment may be appropriate for all children.
- ✓ Children must be monitored



1. PLAY AREA 1 PLAYGROUND EQUIPMENT SHALL BE THE "PLAY BUILDERS" PRODUCT LINE AS MANUFACTURED BY LITTLE TIKES COMMERCIAL, OR APPROVED EQUAL.
2. PLAYGROUND EQUIPMENT SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS AND SPECIFICATIONS.
3. PRIOR TO THE CONSTRUCTION, THE FINAL LOCATION OF THE PLAYGROUND EQUIPMENT SHALL BE FIELD COORDINATED WITH AND APPROVED BY THE RECREATION DEPARTMENT.
4. PLEASE REFER TO DETAIL 3 ON DRAWING C-101 FOR PLAYGROUND EQUIPMENT CAST-IN-PLACE CONCRETE (NYSDOT CLASS A, 4,000 PSI) FOOTING CONSTRUCTION.
5. PLEASE REFER TO THE PROJECT SPECIFICATIONS FOR ADDITIONAL INFORMATION.
6. PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL SUBMIT SHOP DRAWINGS OF THE PROPOSED PLAYGROUND EQUIPMENT LAYOUT PROVIDED FROM THE PLAYGROUND EQUIPMENT MANUFACTURER FOR VILLAGE APPROVAL.
7. PLAY AREA 1 PLAYGROUND EQUIPMENT SHALL BE PAID UNDER ITEM NO. COH65.01140139.



0.	09/21/2015	ARC. PE	ISSUED FOR CONSTRUCTION
REVISION NUMBER	DATE	APP'D BY	REVISION

RECORD DRAWING CERTIFICATION

- ☐ AS BUILT - CHANGES AS NOTED
☐ AS BUILT - NO CHANGES

WATER DEPARTMENT FOREMAN NAME MR. JOHN SPATTA SIGNATURE _____ TITLE _____ DATE _____		PUBLIC WORKS GENERAL FOREMAN NAME MR. MARTIN GARIEPY SIGNATURE _____ TITLE _____ DATE _____	
VILLAGE ENGINEER NAME MR. DANIEL E. O'CONNOR, PE SIGNATURE _____ TITLE _____ DATE _____		COMMISSIONER OF PUBLIC WORKS NAME MR. ANTHONY R. CARR, PE, CFM SIGNATURE _____ TITLE _____ DATE _____	

VILLAGE OF CROTON-ON-HUDSON
DEPARTMENT OF PUBLIC WORKS
OFFICE OF MR. ANTHONY R. CARR, PE, CFM
COMMISSIONER OF PUBLIC WORKS

SUNSET PARK
PLAYGROUND EQUIPMENT UPGRADE
INTERSECTION OF LEXINGTON DRIVE & SUNSET DRIVE
VILLAGE OF CROTON-ON-HUDSON, NY 10520
LAYOUT PLAN AND CONSTRUCTION DETAILS


VOCOH CONTRACT NUMBER 09-2015	SHEET NUMBER C-100
SHEET NO. 1 OF 2	
SCALE: NOT TO SCALE	
DATE: SEPTEMBER 21, 2015	
DEPARTMENT OF PUBLIC WORKS FILE NO. —	REV NO 0

C:\Users\jcarri\Desktop\COH\Capital Projects\Sunset Park Playground Equipment Upgrade\Drawings\Sunset Park Playground Equipment Upgrade_Site.dwg, Sep 21, 2015 - 1:38pm



ISOMETRIC VIEW AND RENDERINGS

1 PLAY AREA 2 PLAYGROUND EQUIPMENT (CONT'D)
C-101 NOT TO SCALE

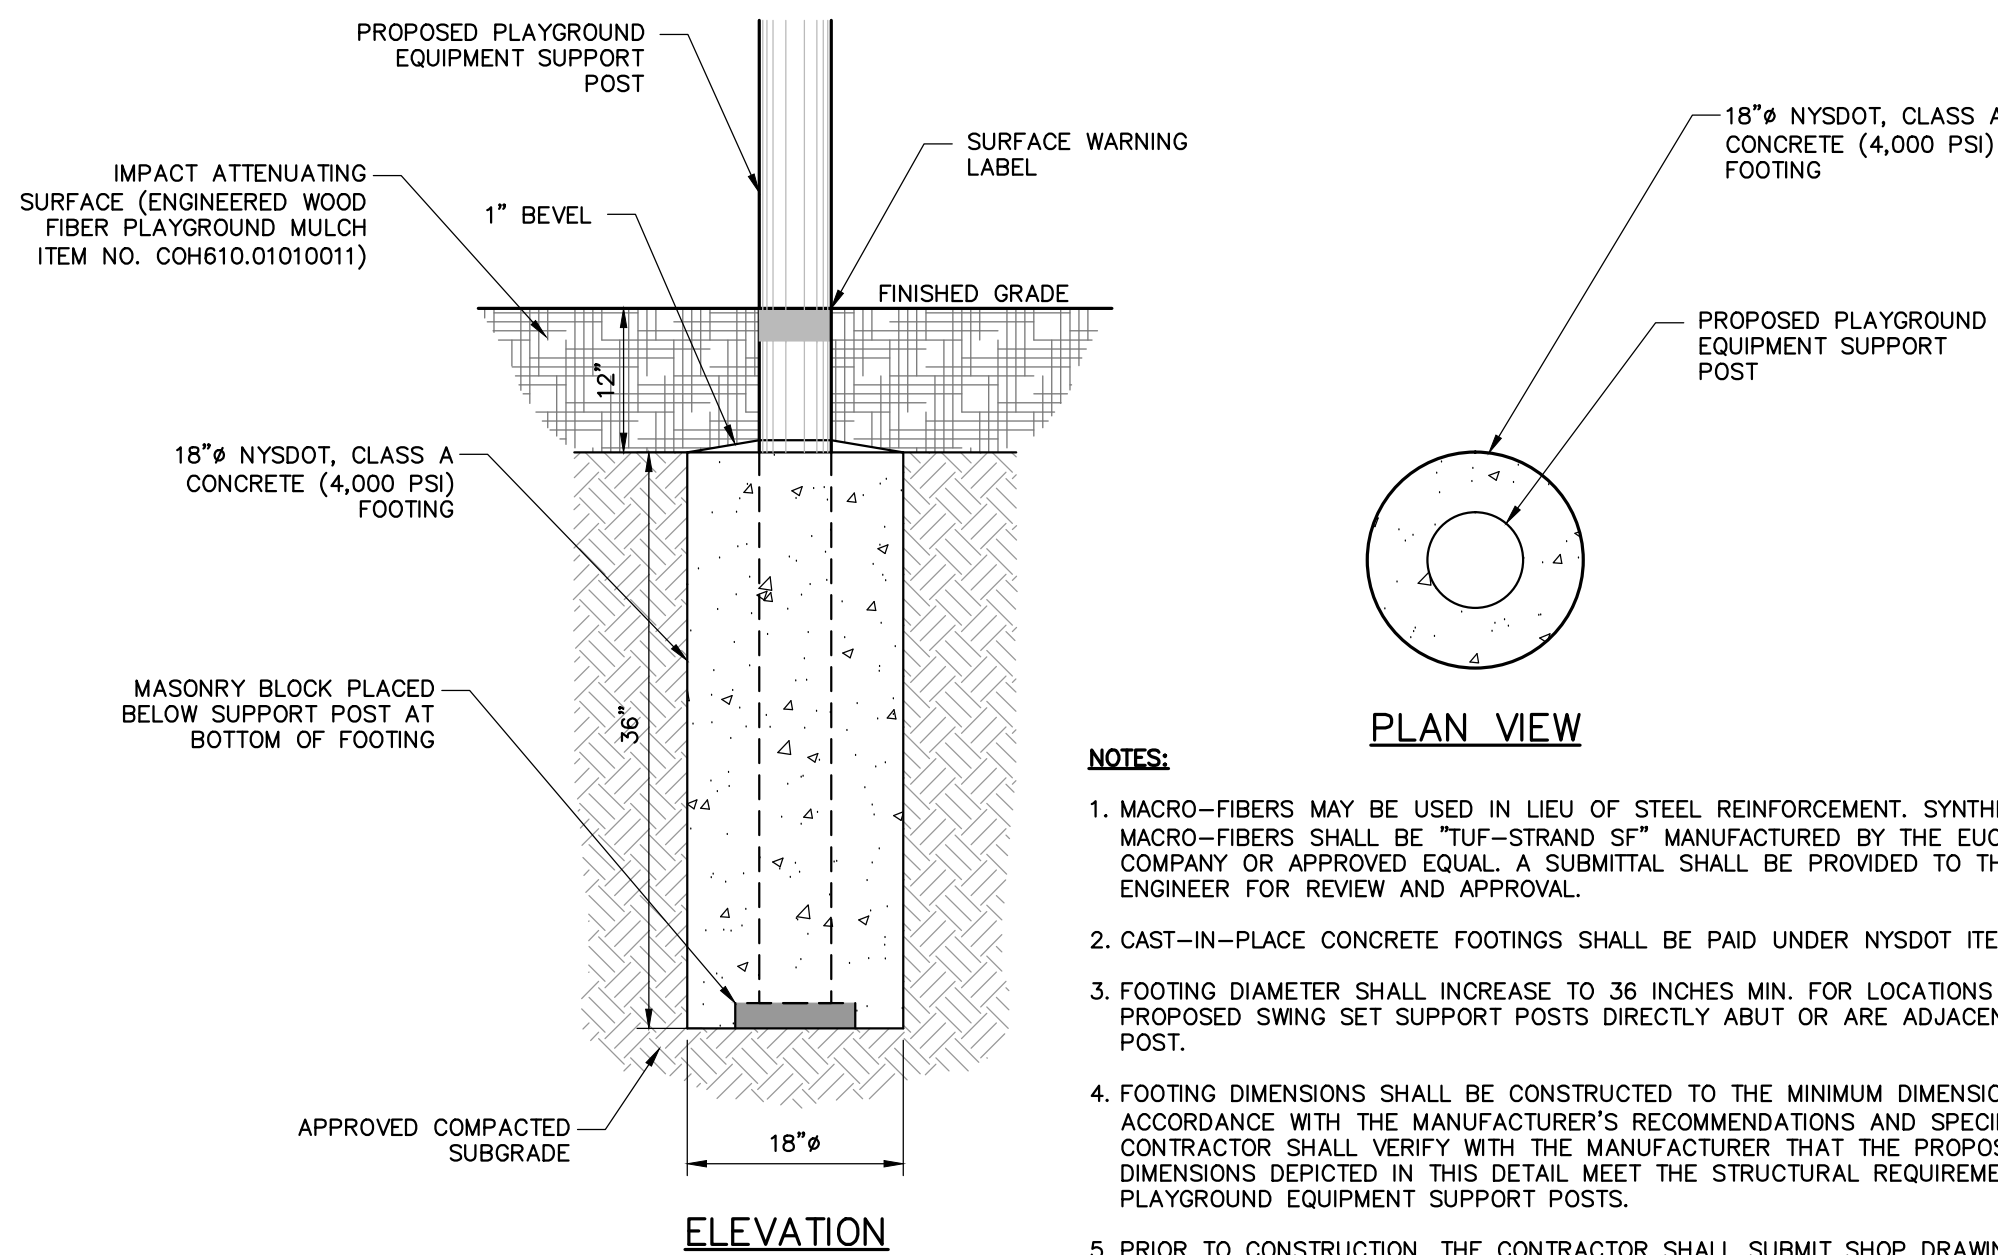


ELEVATION

3 CAST-IN-PLACE CONCRETE FOOTING
C-101 NOT TO SCALE

IN CHARGE OF ARC, PE
CHECKED BY ARC, PE
MADE BY ARC, PE

NOTES:
Scale: 1/8"=1'
1.The 2010 Americans with Disabilities Act (ADA) along with Architectural Barriers Act (ABA) Accessibility Guidelines requires you by law to make your park/play area accessible when viewed in its entirety. Please consult the Accessible Guidelines.
2.For play equipment to be considered accessible an accessible route must be available within the play area to all identified accessible components per ADA and ADA.
3.When adding to an existing play area, it is important to consider the total elevated components to ground level requirements including accessible routes.
4.All deck heights are measured from the top of the finished protective surfacing material.
5.Fall absorbing protection under and around all play equipment within the play area.
6.The minimum recommended safety zone around each play structure and/or independent play equipment is outlined on the layout drawing.
7.Age appropriate label locations are marked with a double asterisk (**)
8.The requirement for a installation is that the post can not be set prior to installing the deck.
9.All post lengths are identified by text showing the post lengths, i.e. 22'0" or 8'7" representing a 22'0" or 8'7" inch post. Scale for reference only. Use dimensions as shown.
10.Elevated Play Activities Total: 0 (0 req)
- Accessible by Transfer: 0 (0 req)
- Accessible by Ramp: 0 (0 req)
Ground Level Activity Type: 1 (0 req)
Ground Level Activity Quantity: 1 (0 req)
Scale for reference only. Use dimensions as shown.

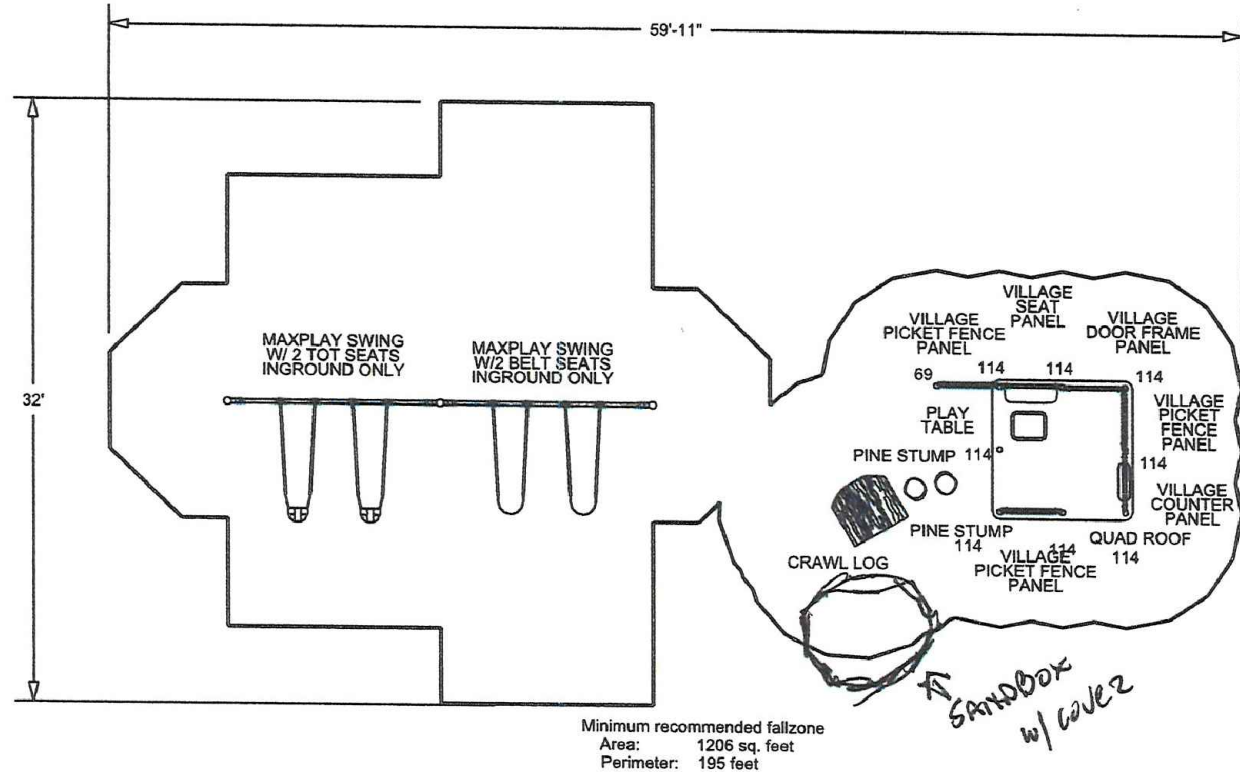

LAYOUT PLAN



ISOMETRIC VIEW AND RENDERINGS

2 PLAY AREA 3 & 4 "SAND AND PLAY" PLAYGROUND EQUIPMENT
C-101 NOT TO SCALE

ANY ALTERATION OF PLANS, SPECIFICATIONS, PLATS AND REPORTS BEARING THE SEAL OF A LICENSED PROFESSIONAL ENGINEER OR LICENSED LAND SURVEYOR IS A VIOLATION OF SECTION 7209 OF THE NEW YORK STATE EDUCATION LAW, EXCEPT AS PROVIDED FOR BY SECTION 7209, SUBSECTION 2.



ISOMETRIC VIEW AND RENDERINGS

NOTES:

1. PLAY AREA 3 & 4 "SAND AND PLAY" PLAYGROUND EQUIPMENT SHALL BE THE "PLAY BUILDERS" PRODUCT LINE AS MANUFACTURED BY LITTLE TIKES COMMERCIAL, OR APPROVED EQUAL.
2. PLAYGROUND EQUIPMENT SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS AND SPECIFICATIONS.
3. PRIOR TO THE CONSTRUCTION, THE FINAL LOCATION OF THE PLAYGROUND EQUIPMENT SHALL BE FIELD COORDINATED WITH AND APPROVED BY THE RECREATION DEPARTMENT.
4. PLEASE REFER TO DETAIL 3 ON THIS DRAWING FOR PLAYGROUND EQUIPMENT CAST-IN-PLACE CONCRETE FOOTING CONSTRUCTION.
5. PROPOSED "SAND AND PLAY" SHALL INCLUDE A 10 FOOT X 10 FOOT SAND BOX AND BOX COVER. PLAY SAND SHALL BE PAID FOR SEPARATELY UNDER ITEM NO. COH203.25010039.
6. PLEASE REFER TO THE PROJECT SPECIFICATIONS FOR ADDITIONAL INFORMATION.
7. PLAY AREA 3 & 4 "SAND AND PLAY" PLAYGROUND EQUIPMENT SHALL BE PAID UNDER ITEM NO. COH615.0114030439.

	VILLAGE OF CROTON-ON-HUDSON STANLEY H. KELLERHOUSE MUNICIPAL BUILDING 1 VAN WYCK STREET (2nd FLOOR) WESTCHESTER COUNTY VILLAGE OF CROTON-ON-HUDSON, NY 10520 PHONE: (914) 271-3775 FAX: (914) 271-2856		

REVISION BLOCK

0.	09/21/2015	ARC, PE	ISSUED FOR CONSTRUCTION
REVISION NUMBER	DATE	APP'D BY	REVISION

RECORD DRAWING CERTIFICATION

- ☐ AS BUILT - CHANGES AS NOTED
☐ AS BUILT - NO CHANGES

WATER DEPARTMENT FOREMAN		PUBLIC WORKS GENERAL FOREMAN	
NAME <u>MR. JOHN SPATTA</u>		NAME <u>MR. MARTIN GARIEPY</u>	
SIGNATURE _____		SIGNATURE _____	
TITLE _____	DATE _____	TITLE _____	DATE _____
VILLAGE ENGINEER		COMMISSIONER OF PUBLIC WORKS	
NAME <u>MR. DANIEL E. O'CONNOR, PE</u>		NAME <u>MR. ANTHONY R. CARR, PE, CFM</u>	
SIGNATURE _____		SIGNATURE _____	
TITLE _____	DATE _____	TITLE _____	DATE _____

VILLAGE OF CROTON-ON-HUDSON DEPARTMENT OF PUBLIC WORKS OFFICE OF MR. ANTHONY R. CARR, PE, CFM COMMISSIONER OF PUBLIC WORKS		VOCH CONTRACT NUMBER 09-2015	SHEET NUMBER C-101
SUNSET PARK PLAYGROUND EQUIPMENT UPGRADE INTERSECTION OF LEXINGTON DRIVE & SUNSET DRIVE VILLAGE OF CROTON-ON-HUDSON, NY 10520 LAYOUT PLAN AND CONSTRUCTION DETAILS		SHEET NO. 2 OF 2 SCALE: NOT TO SCALE DATE: SEPTEMBER 21, 2015 DEPARTMENT OF PUBLIC WORKS FILE NO. -	
		REV. NO.: 0	